

## Example 9

## Conditions



Although lateral lifting clamps were used opposite to each other, they were unbalanced. The steel plate tilted sideways, slipped out of the clamps, and fell.

## Results


Models: SL (SLE)

### Similar applicable models

E, RS(RSE), SLT(SLTE)  
and RST(RSTE)

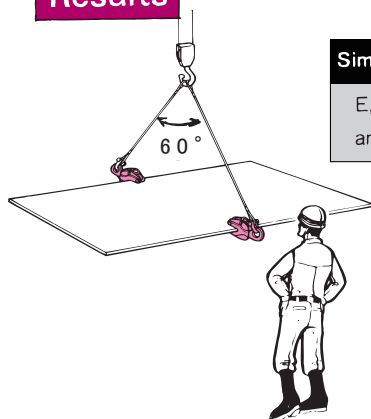

## ⚠ WARNING

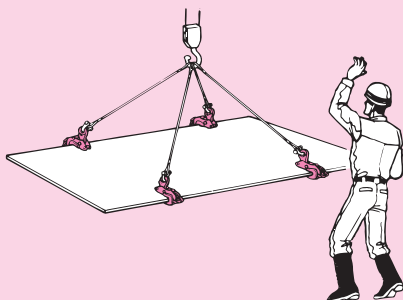

Models: AMS, VAR and VARE



Models: HO  
and HOE

Models:  
G and GE



- When flat steel plates are lifted, it is usually safe to use horizontal lifting or lateral lifting clamps with a 4-point lifting technique.
- Use the right clamps.