

Example 33

Conditions

When a lateral lifting clamp (for shape steel) was placed upside down and the workpiece was transported and landed, the clamp dropped off and the workpiece fell.


Results

Models: G (GE)




Similar applicable models

VA(VAE), AMS,
and VAR(VARE)

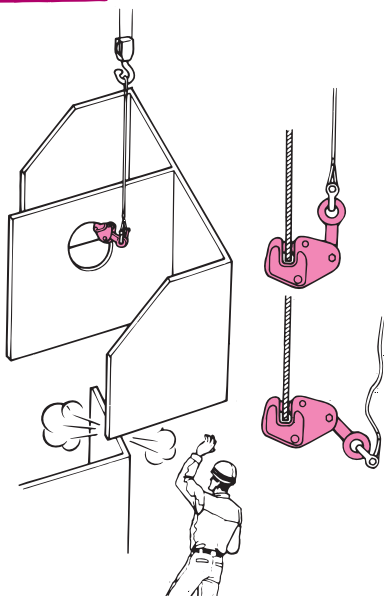

WARNING

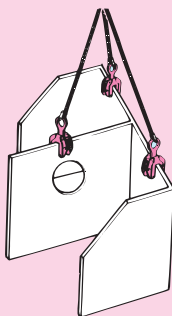

- Use proper clamps.
- Observe proper operation.
- Always use 3- or 4-point lifting when lifting structures.

