

Example 38

Conditions



After a sheet pile (L = 611 mm (Type II), T = 8 mm, W = 288 kg) was lifted from the ground using a silent piler, it was completely pulled out and then carried using a clamp. The sheet pile tilted after touching the ground on the opposite shore, and the clamp came off when the sheet pile tilted at an angle of about 45 degrees.

Results


Similar applicable models

PE

Model : PER

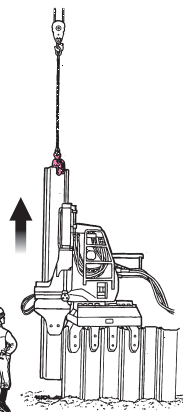

⚠WARNING



- Use of auxiliary hardware (Model SBB, Model SBBE, etc.)
- Checking the wear in the tooth plates and swivel jaws
- Implementation of regular inspections
- Distribution of the materials for safe work
- Training on how to use properly
- Prohibition of workers or people in the falling and swinging range

